




- Using CMOS IC, high reliability and stability
- High repeat accuracy $\pm 1\%$
- Large transparent for easy adjustment and monitor
- Bi-Color LED provides status indication for power ON and time UP
- Offered in a wide range of AC or DC operating voltage
- Wide variety of 15 time ranges (0.1sec to 24hrs)
- Output contact 2C delay or 1C delay with 1C instantaneous can select by pushing "MODE" switch to A or B

SPECIFICATIONS

FULL TIME RANGE		A : 1S, 10S, 1M, 10M B : 3S, 30S, 3M, 30M C : 6S, 60S, 6M, 60M D : 1M, 10M, 1H, 10H E : 3M, 30M, 3H, 30H		
RATED VOLTAGE		DC(V): 12, 24, 48 AC(V): 12, 24, 48, 110, 220, 240, 380, 415, 440, 50/60Hz		
INDICATOR OPERATING		ON-UP Two indicator lamp		
o/p C O N T A C T	MODEL	AH3-N		
	TIME LIMIT 1C		5A	
	TIME LIMIT 2C	5A		
	INSTANTANEOUS 1C		5A	
LIFE	MECHANICAL	5 x 10 ⁶ times		
	ELECTRICAL	10 ⁵ times		
RESET TIME		0.1 sec max		
CONSUMED POWER		2VA		
AMBIENT TEMPERATURE		-10°C~ +55°C		
AMBIENT HUMIDITY		45~85%RH		
WEIGHT		Approx. 170g	Approx. 175g	Approx. 180g

CONNECTION DIAGRAMS & TIMING CHARTS

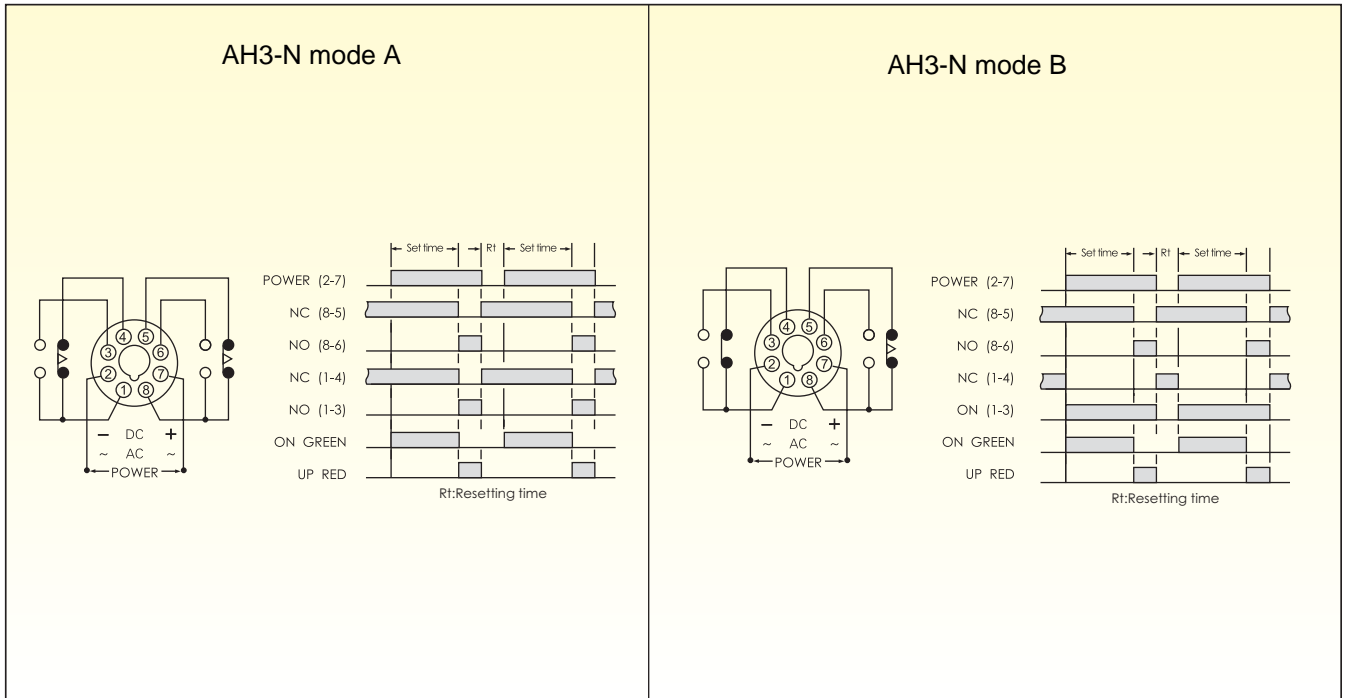

DIMENSION

